


Fiber Access Terminal Box FAT-R16

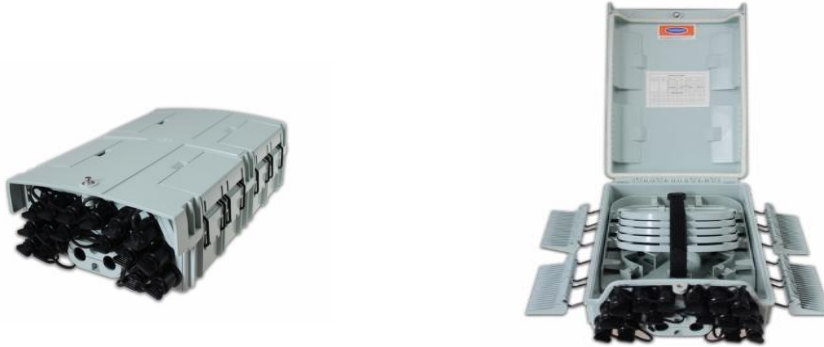

Fiber optic access terminal box FAT-R16 is designed for FTTx network application with waterproof protection level at IP-65 to hold upto 16 subscribers and 120 splicing point. ABS+PC material case provides solid protection for feeder cable splicing, distribution, splitting, storage, and connection.

Features

- Flap-up splice tray and adapter holder are integrated
- Max 2pcs 1*8 splitter can be installed
- Waterproof protection grade IP65
- Wall mounted, aerial, pole mounted, suitable for pre-connectorized drop cable with reinforced connectors
- Reasonable design to ensure the bend radius more than 40mm
- 180 degree access with buckled lock structure
- Stainless anti-rust bolts and nuts
- 1 mid span cable entrance(10-16.5mm) for uncut cable
- Max 120 fiber splicing capacity, easy maintenance, expansion

Technical Parameters

Item	Parameter
Model	IP 68
Installation Way	Outdoor Aerial or wall mounted, pole mounted,
Splicing point	120c fiber, 5pcs 24 splice tray
Material	ABS +PC
Weight	1.85KG
PLC splitter	2 pcs 1*8
Adapter Number	16pcs SC simplex
Colore	Grey or Black